




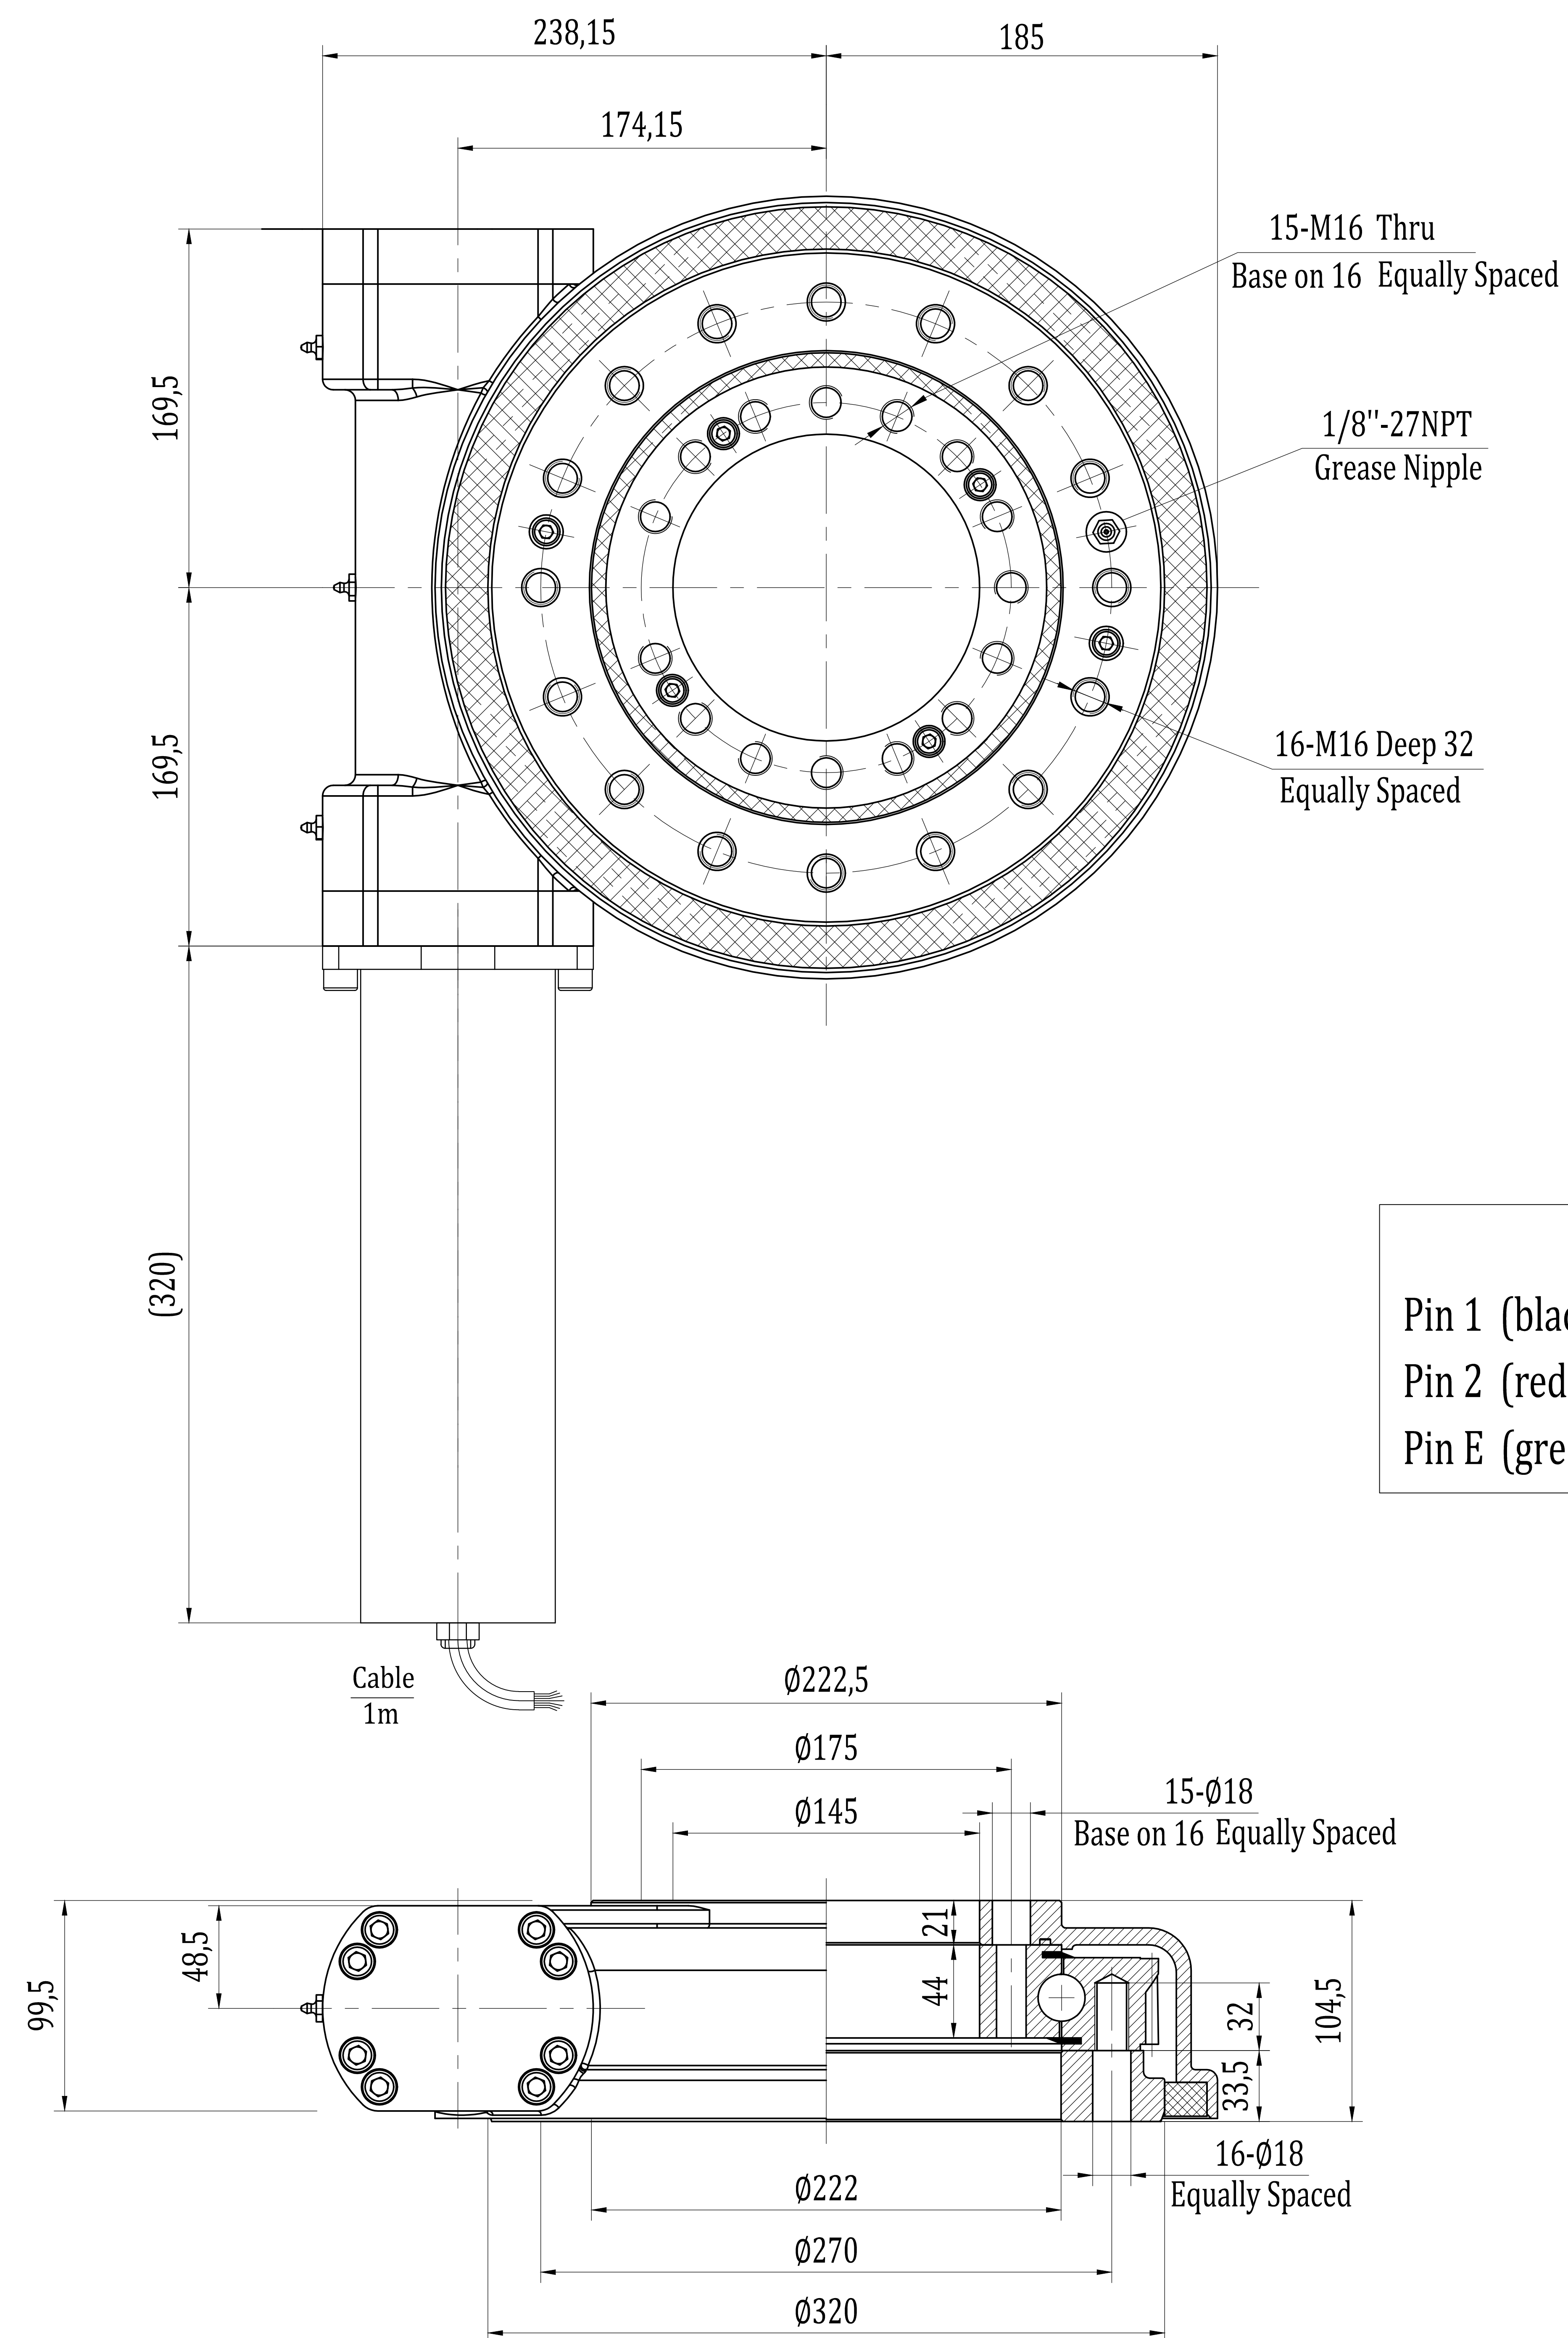


Wire Define		
Pin 1 (black)	motor -	
Pin 2 (red)	motor +	
Pin E (green)	GND	

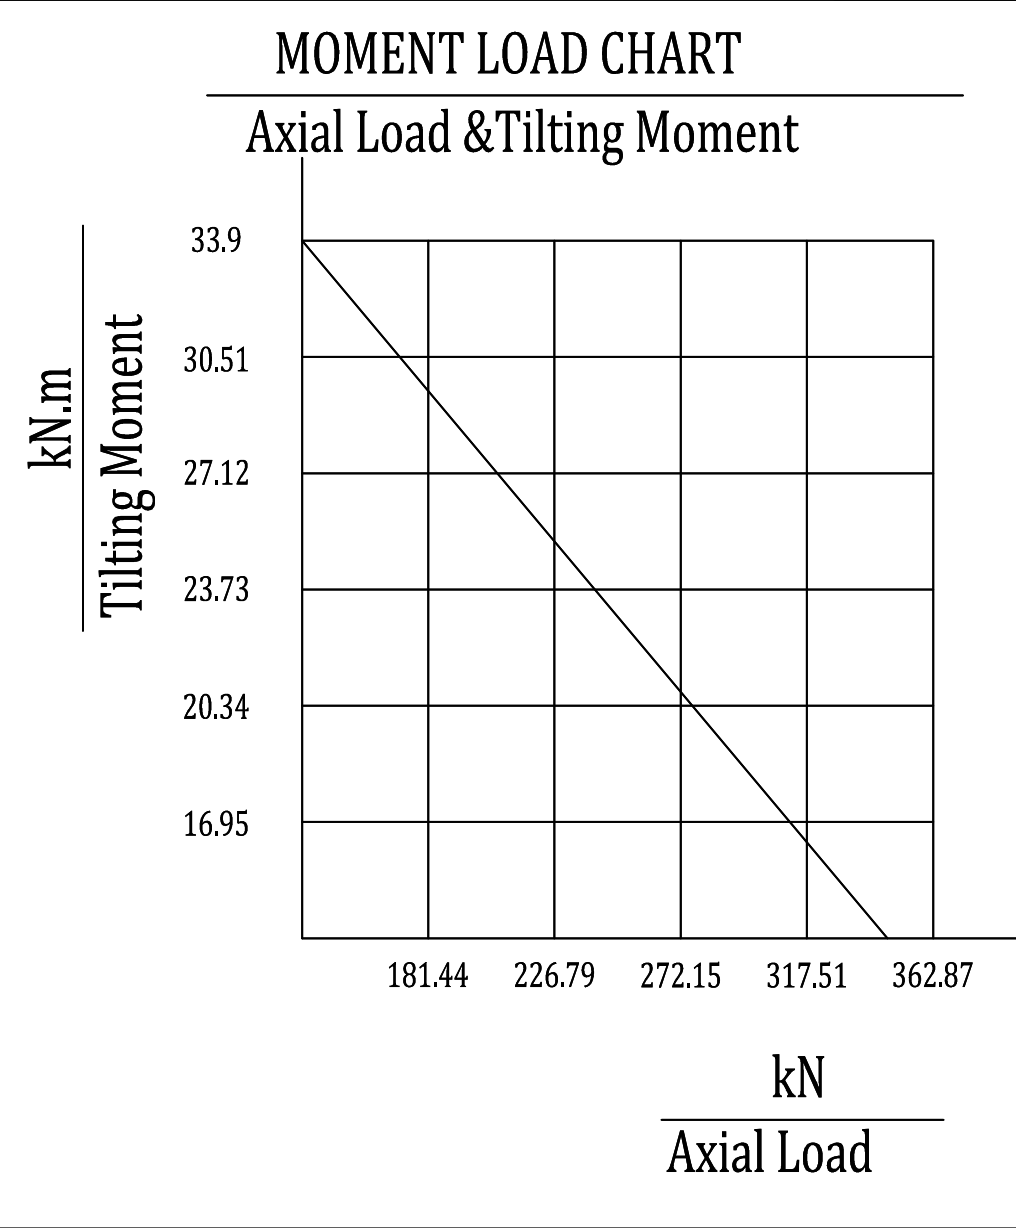

Slewing Drive Performance Parameters		
Rated Output Speed	0.02rpm	
Output Torque	7.81 kN.m	5.8x10 ³ lbf.ft
Tilting Moment	33.9 kN.m	25x10 ³ lbf.ft
Holding Torque	38.7 kN.m	29x10 ³ lbf.ft
Static Axial Load Rating	338 kN	76x10 ³ lbf
Static Radial Load Rating	135 kN	30x10 ³ lbf
Gear Ratio	61:1	
Precision	≤0.17°	
IP Class	IP 65	
Corrission Grade	C 3	
24VDC Motor Performance Data		
Rated Output Torque	320 N.m	
Rated Output Speed	1.2 rpm	
IP Class	IP 65	
Rated Current	≤6.5A	

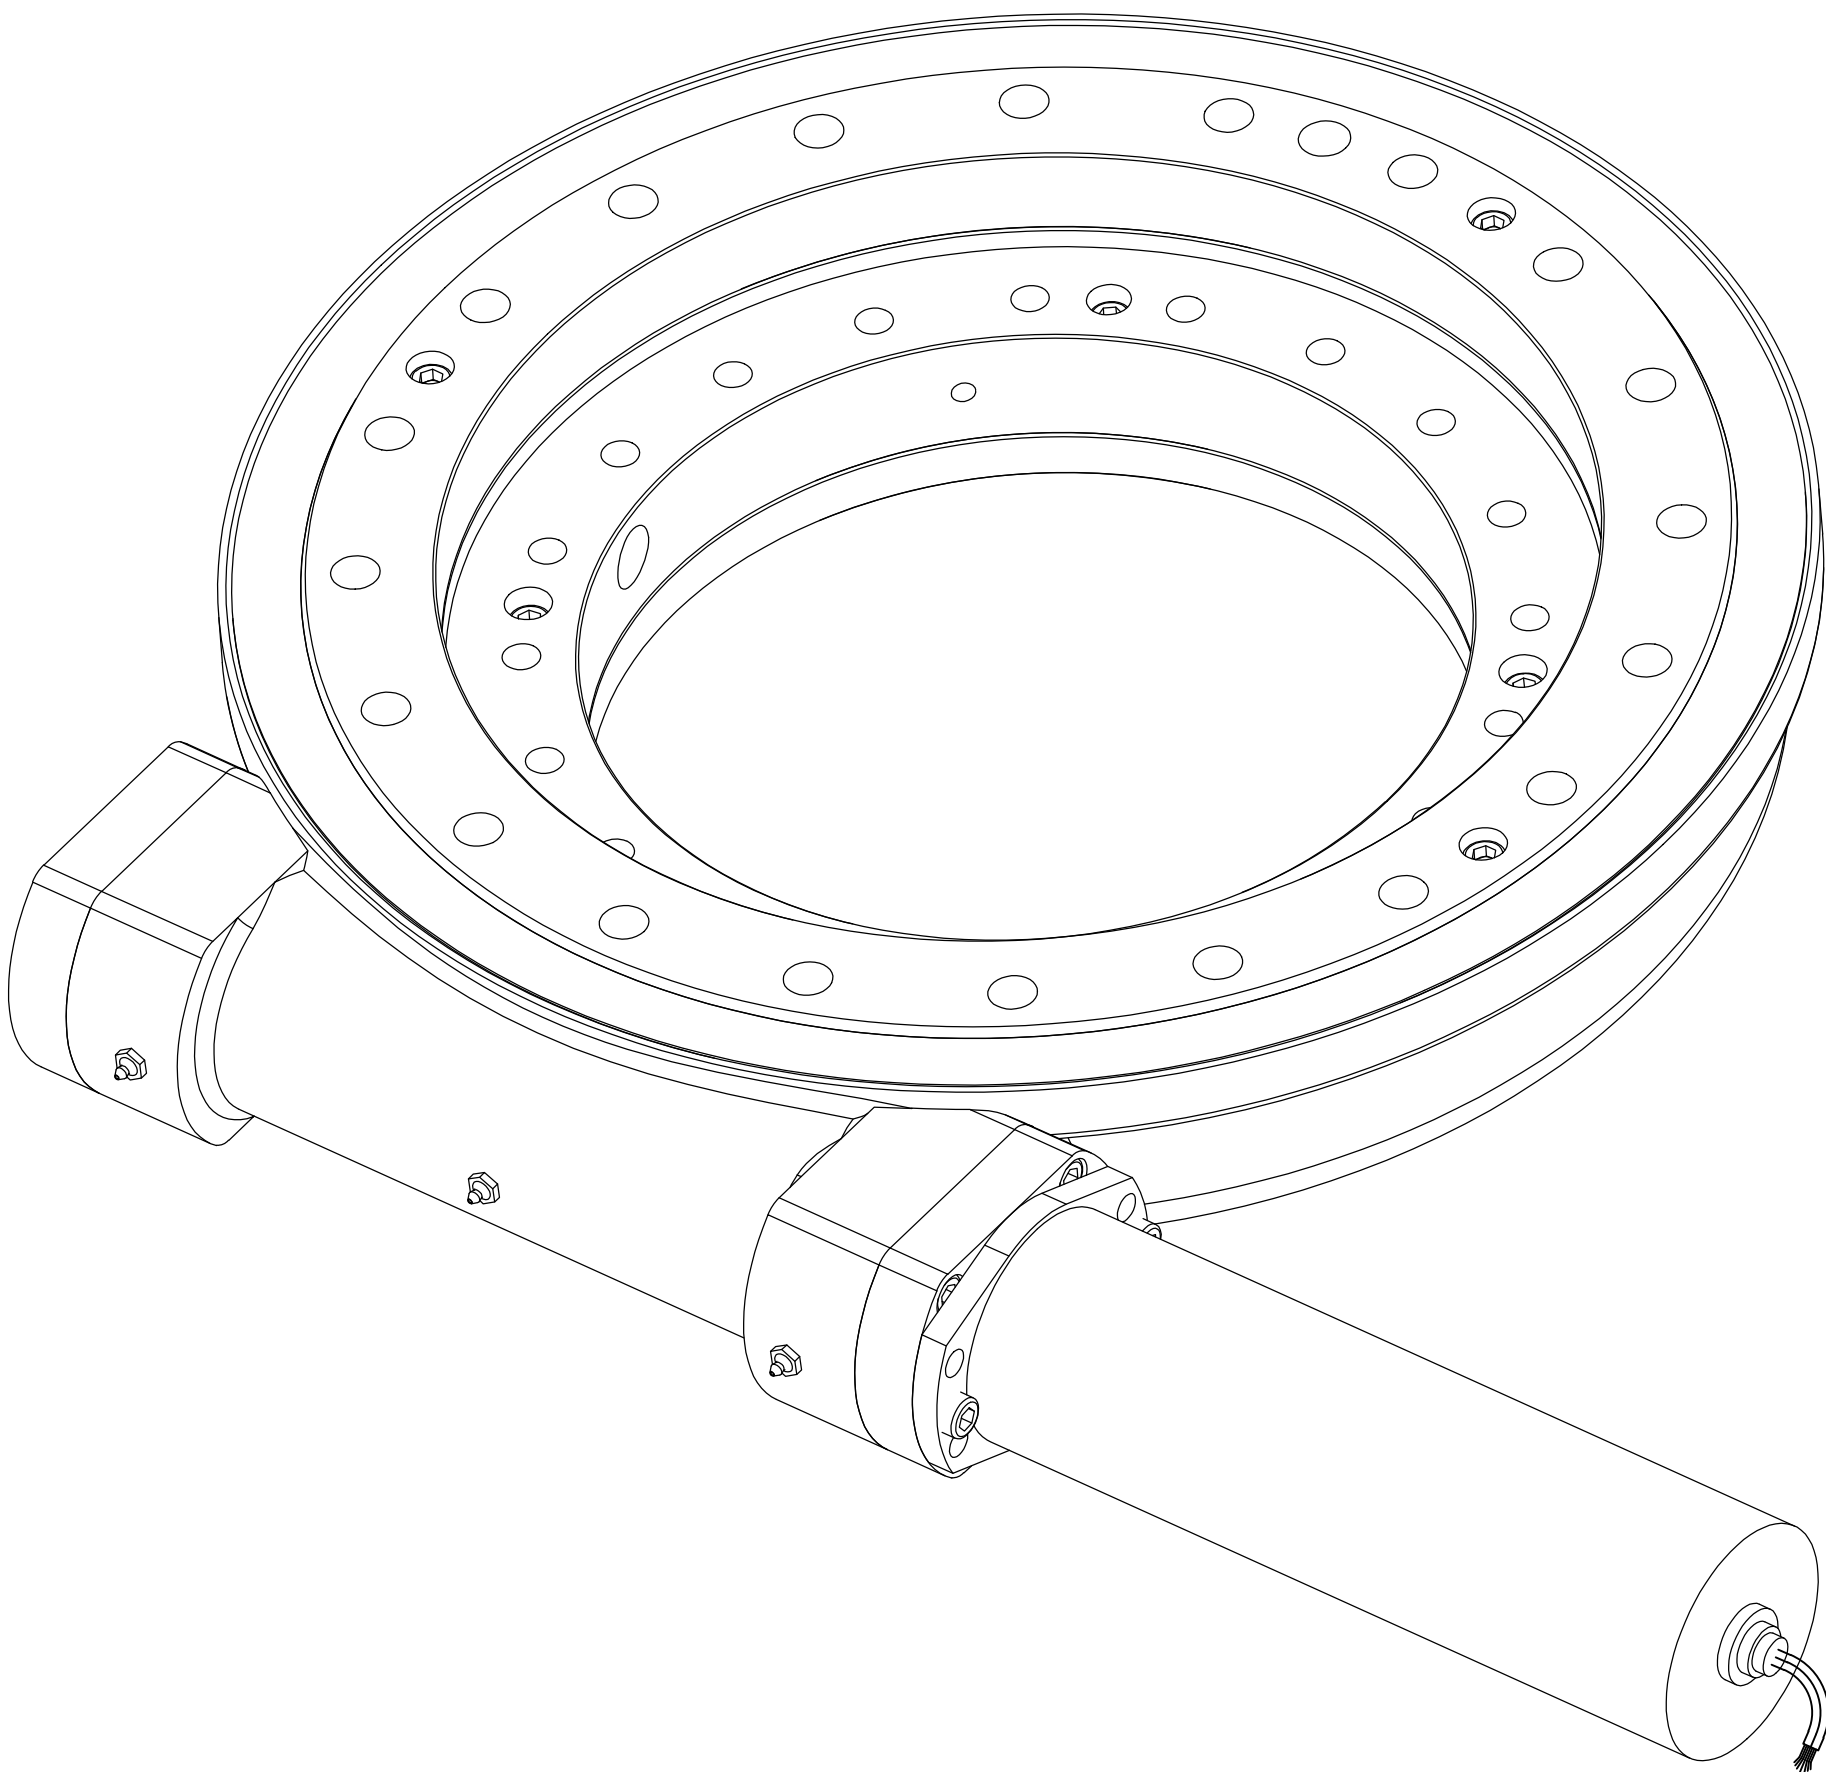

REV	DATE	REVISER	REVISER			
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2019/8/1	Rui Wang				
APPROVED BY	2019/8/1	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
			62 kg	1 : 3		
			SIZE	A3	SC9-61-RC-2412320	
SYMBOLE ISO			SHEET	1 / 1		
					REV	A